


Low-cost Press-in Force Monitoring with Position Triggering GM80-TG/-PA

- Easy Operation
- Flank Triggering
- Window Triggering
- Measuring Rate 1000/s
- 2 Limit Values
- No Displacement Measuring System necessary

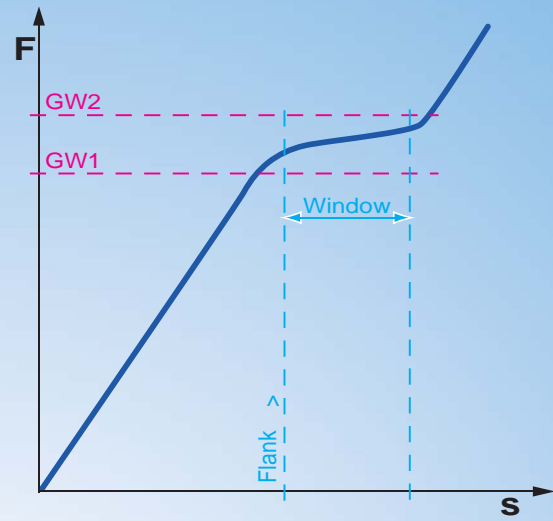

Suitable for many simple press-in force applications:

The system is being controlled by 2 digital inputs (initial position, measurement release).

24 V supply for indicators can be taken out from the GM80-TG/-PA.

The representation of the force distribution is possible by the RS232 interface, which can be used as a documentation interface as well.

The required software is freeware.