


DR-3000 mit Kupplung Typ 9000 (fester Sensoreinbau)
DR-3000 with coupling type 9000 (stiff sensor assembly)

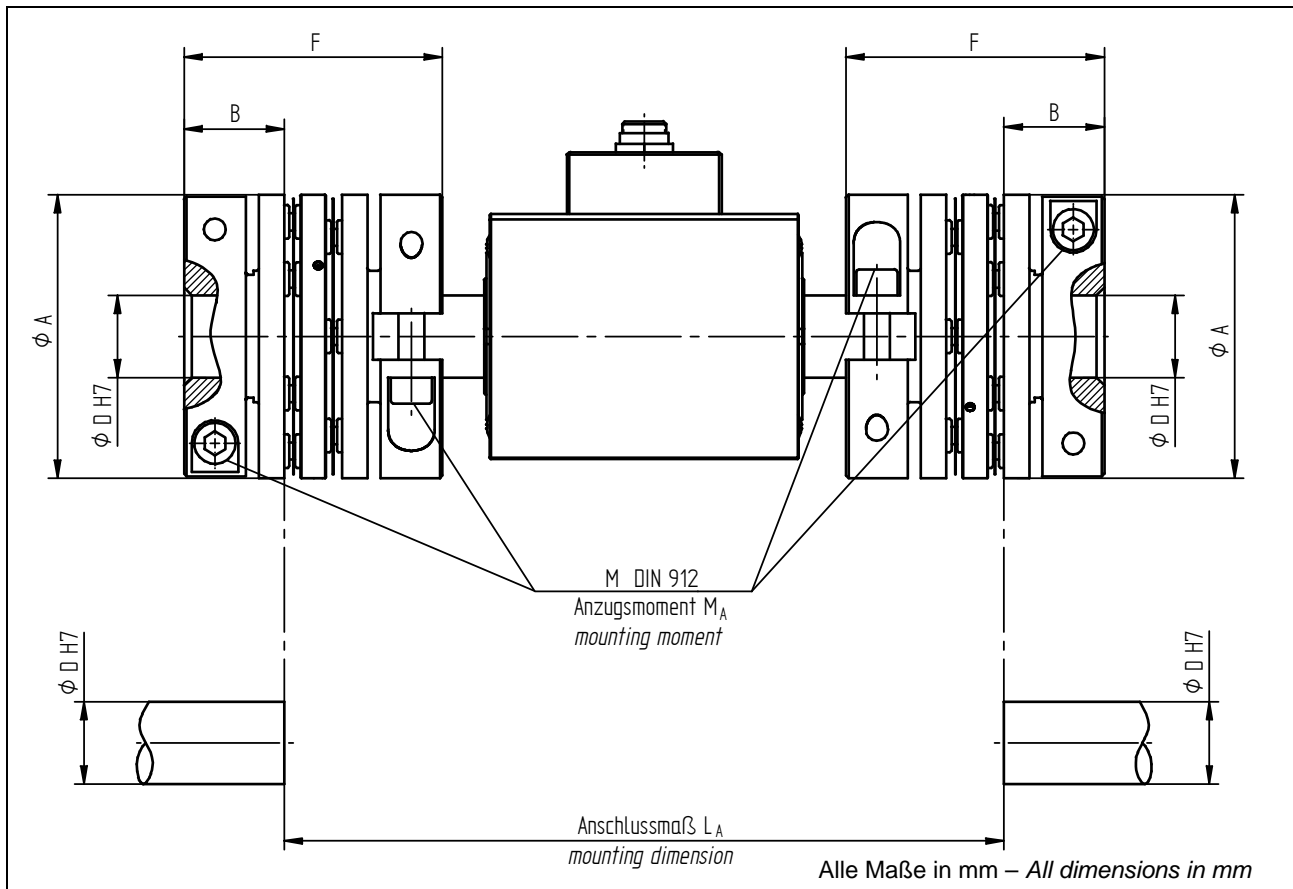

TECHNISCHE DATEN – Specifications

Typ 9000

Messbereich - Measuring range [N·m]	Größe - Size	Max. Drehzahl - Max. speed [U/min]	Abmessungen - Dimensions [mm]						M _A [N·m]
			ØA	B	ØD	F	L _A	M	
50	10	20000	80	34,5	15 ... 40	91	207	M8	34
100	10	20000	80	34,5	15 ... 40	91	207	M8	34
200	25	15000	110	38,9	16 ... 42	100	278,4	M10	67
300	40	15000	140	50	25 ... 55	127	288	M12	87
500	63	15000	147	50	25 ... 60	128	290	M12	87
1000	100	15000	173	65	42 ... 75	162,5	319	M12	120

Bei Bestellung bitte immer den gewünschten Ø D angeben! Please specify requested bore Ø D at order!

Wuchtgüte G 2,5 / Balance quality G 2,5