

Compression Force Sensor K-1250 with Rated Force from 2 ... 100 kN




Performance Features

- Compression force sensor for press-in force survey
- TEDS (Transducer Electronic Data Sheet)
Standard IEEE 1451.4 (optional)
- Stainless steel
- Level of protection IP60
- Long-term stability
- Simple handling and assembly
- Special versions on request

Application

- Equipment engineering
- Automotive industry
- Measuring and control devices
- Fully automated machining centres
- Tool engineering
- Special mechanical engineering

Dimensions in mm

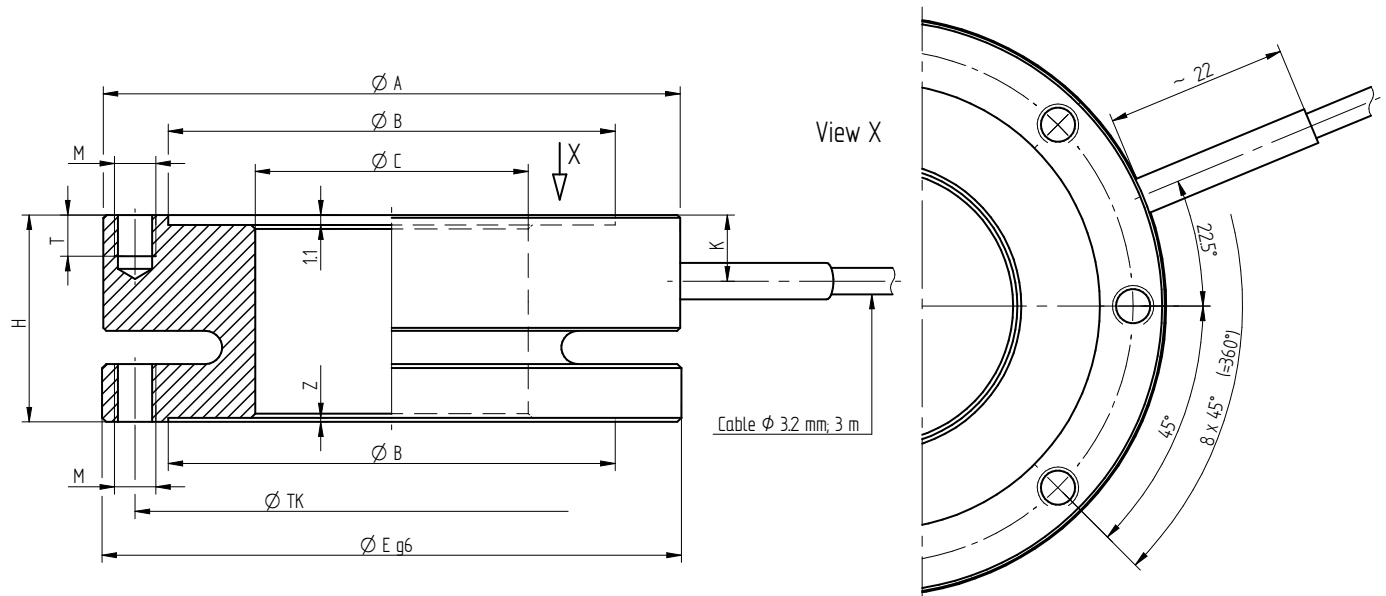

Article-No.	Rated Force [kN]	Dimensions [mm]										Screws		Weight [kg]
		ØA	ØB	ØC	ØE	H	K	M	ØTK	T	Z	Tightening Torque [N·m]	Property Class	
100485	2	69.7	54	33	70	25	8	M5	62	5	0.5	9.5	12.9	0.5
100486	5													
100487	10													
100488	20													
100489	50	111.5	97	70	112	35	13	M6	104	6	1.1	16.4		1.1
100490	100													

Connection Assignment

Electrical connection

Excitation (-)	Green	●
Excitation (+)	Brown	●
Signal (+)	Yellow	●
Signal (-)	White	○
Control signal or TEDS (option)	Gray	●
Shielding	Shield	⊥

Technical Data acc. to VDI/VDE/DKD 2638

Compression Force Sensor K-1250 with Through Hole

Rated force F_{nom}	kN	2	5	10	20	50	100
Accuracy class	% F _{nom}	0.5					
Rel. repeatability error in unchanged mounting position b_{rg}	% F _{nom}	0.1					
Relative creep	% F _{nom} /30 min	<±0.1					
Rated characteristic value C_{nom}	mV/V	1.00 ±20 %					
Input/output resistance R_e/R_a	Ω	700					
Insulation resistance R_{is}	Ω	>2*10 ⁹					
Rated range of excitation voltage B_{U, nom}	V	2 ... 12					
Electrical connection		Cable, PURS, 3 m with free strands					
Reference temperature T_{ref}	°C	23					
Rated temperature range B_{T, nom}	°C	-10 ... 70					
Operating temperature range B_{T, G}	°C	-30 ... 80					
Storage temperature range B_{T, S}	°C	-50 ... 95					
Temperature effect on zero signal TK₀	% F _{nom} /10 K	±0.2					
Temperature effect on characteristic value TK_C	% F _{nom} /10 K	±0.2					
Maximum operating force F_G	% F _{nom}	130					
Force limit F_L	% F _{nom}	150					
Breaking force F_B	% F _{nom}	>300					
Permissible oscillation stress F_{rb}	% F _{nom}	70					
Rated displacement S_{nom}	mm	<0.15					
Material housing body		Stainless steel					
Material cover plate		Aluminum					
Level of protection		IP60					

Options

Article-No.	Description	
100218	Control signal	100 % F _{nom}
100739	Control signal	80 % M _{nom}
106154	Control signal	50 % M _{nom}
113134	TEDS-standard IEEE 1451.4	
100896	Rated sensitivity adjustment	
42828	Extended temperature range	-30 °C ... 100 °C
42829	Extended temperature range	-30 °C ... 120 °C
42830	Extended temperature range	-40 °C ... 150 °C
103954	Calibration in kg or t	
107592	6-wire connection	

Calibrations

Article-No.	Description	
400628	Linearity diagram in accordance to factory standard	25 % steps
400170	Linearity diagram in accordance to factory standard	10 % steps
400960	Proprietary calibration acc. to DIN EN ISO 376 and DAkkS-DKD-R 3-3	3 steps
400652	Proprietary calibration acc. to DIN EN ISO 376 and DAkkS-DKD-R 3-3	5 steps
400640	Proprietary calibration acc. to DIN EN ISO 376 and DAkkS-DKD-R 3-3	8 steps
	DAkkS-Calibration / Standard on request	

Accessories

Electrical Connection

Article-No.	Description
10323	Cable connector KS6 (6-pin series 581) incl. sensor mounting
10320	Cable connector KSSH15 (15-pin) incl. sensor mounting
43418	Input connector ZA9612FS (ALMEMO) incl. sensor mounting and connector calibration
49205	Input connector ZKD712FS (ALMEMO 202) incl. sensor mounting and connector calibration

Amplifiers

Examples of suitable amplifiers for the compression force sensor K-1250:

LCV	SI-USB	GM 40	GM 80	GM 80-PA
				

Further suitable amplifiers you can find on our homepage under <https://www.lorenz-messtechnik.de/english/products/>