

Miniature Tension Force Sensor K-100 with Rated Force from 1 ... 100 kN

Data sheet


**Performance Features**

- Miniature sensor for tension force
- TEDS (Transducer Electronic Data Sheet)
Standard IEEE 1451.4 (optional)
- Simple handling and assembly
- Reliable and durable
- Long-term stability
- Level of protection IP65
- Special versions on request

Application

- Equipment engineering
- Fully automated machining centres
- Measuring and control devices
- Rope force measurement
- Tool engineering
- Special mechanical engineering

Dimensions in mm

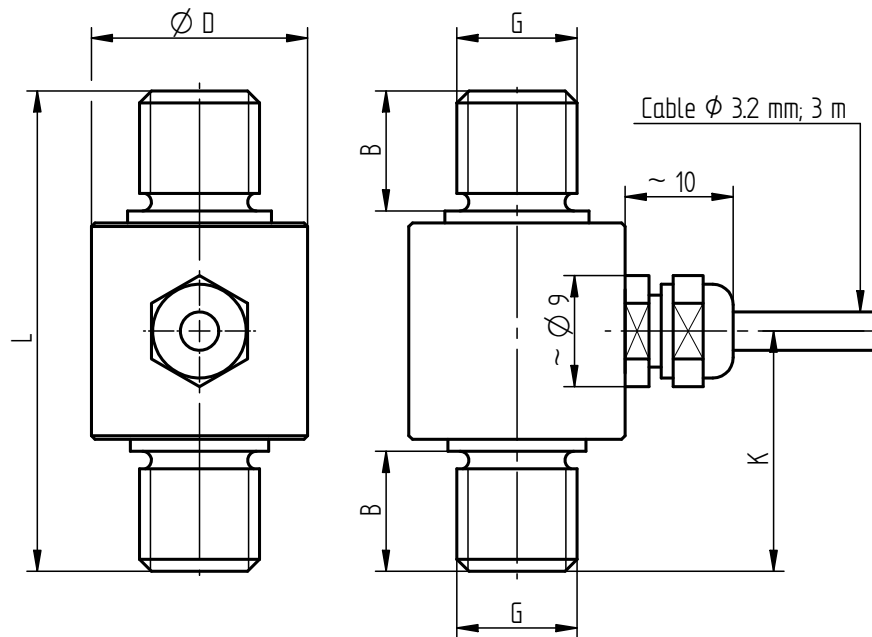

Article-No.	Rated Force [kN]	Dimensions [mm]					Weight [kg]
		B	$\varnothing D$	G	K	L	
100120	1	8	14	M5	17.5	35	0.1
100121	2	8	14	M5	17.5	35	
100122	5	8	14	M8	17.5	35	
100123	10	10	18	M10	20	40	0.2
100124	20	12	24	M12	22.5	45	
100125	50	15	29	M16	25	50	0.3
104419	100	20	35	M24x2	35	70	0.4

Connection Assignment

Electrical connection

Excitation (-)	Green	●
Excitation (+)	Brown	●
Signal (+)	Yellow	●
Signal (-)	White	○
Control signal or TEDS (option)	Gray	●
Shielding	Shield	⊕

Technical Data acc. to VDI/VDE/DKD 2638

Miniature Tension Force Sensor K-100

Rated force F_{nom}	kN	1	2	5	10	20	50	100
Accuracy class	% F _{nom}	0.3						
Rel. repeatability error in unchanged mounting position b_{rg}	% F _{nom}	0.1						
Relative creep	% F _{nom} /30 min	<±0.1						
Rated characteristic value C_{nom}	mV/V	1.00 ±15 %						
Input/output resistance R_e/R_a	Ω	350						
Insulation resistance R_{is}	Ω	>2*10 ⁹						
Rated range of excitation voltage B_{U, nom}	V	2 ... 12 [≤5 kN; 2 ... 6]						
Electrical connection		Cable, PURS, 3 m with free strands						
Reference temperature T_{ref}	°C	23						
Rated temperature range B_{T, nom}	°C	-10 ... 70						
Operating temperature range B_{T, G}	°C	-30 ... 80						
Storage temperature range B_{T, S}	°C	-50 ... 95						
Temperature effect on zero signal TK₀	% F _{nom} /10 K	±0.2						
Temperature effect on characteristic value TK_C	% F _{nom} /10 K	±0.2						
Maximum operating force F_G	% F _{nom}	130						
Force limit F_L	% F _{nom}	150						
Breaking force F_B	% F _{nom}	>300						
Permissible oscillation stress F_{rb}	% F _{nom}	70						
Rated displacement S_{nom}	mm	<0.1						
Material measuring body		Stainless steel						
Material housing		Aluminum						
Level of protection		IP65						

Options


Article-No.	Description	
100218	Control signal	100 % F _{nom}
100739	Control signal	80 % M _{nom}
106154	Control signal	50 % M _{nom}
113134	TEDS-standard IEEE 1451.4	
100896	Rated sensitivity adjustment	
42828	Extended temperature range	-30 °C ... 100 °C [≥20 kN]
42829	Extended temperature range	-30 °C ... 120 °C [≥20 kN]
42830	Extended temperature range	-40 °C ... 150 °C [≥20 kN]
103954	Calibration in kg or t	
107592	6-wire connection	

Calibrations

Article-No.	Description	
400628	Linearity diagram in accordance to factory standard	25 % steps
400170	Linearity diagram in accordance to factory standard	10 % steps
400960	Proprietary calibration acc. to DIN EN ISO 376 and DAkkS-DKD-R 3-3	3 steps
400652	Proprietary calibration acc. to DIN EN ISO 376 and DAkkS-DKD-R 3-3	5 steps
400640	Proprietary calibration acc. to DIN EN ISO 376 and DAkkS-DKD-R 3-3	8 steps
	DAkkS-Calibration / Standard on request	

Accessories

Dimensions of Joint Eye Type EF in mm

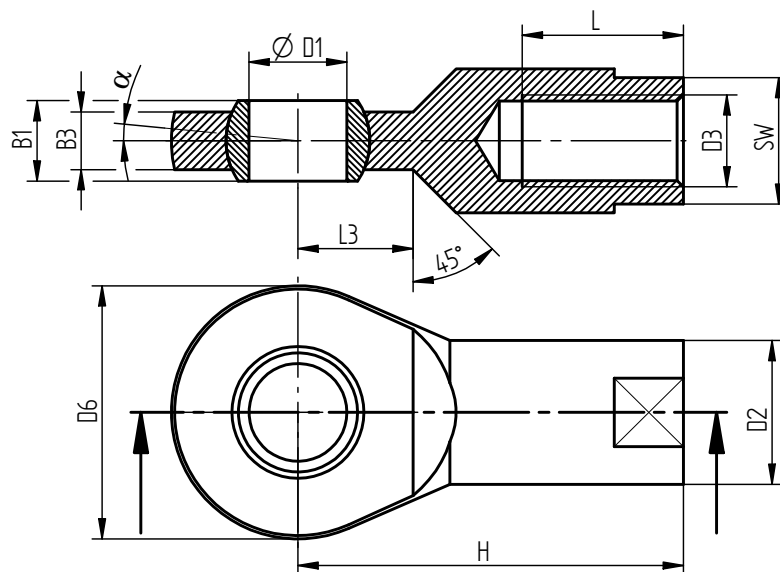

Article-No.	Type - EF	Dimensions [mm]											Weight [kg]	Load rating stat. C ₀ [N]
		B1	B3	ØD1	D2	D3	D6	H	L	L3	α	SW		
43805	EF 5	8	6	5	11	M5	18	27	10	10	6.5°	9	0.02	11900
42768	EF 8	8	5	8	13	M8	23	36	16	12	7.5°	11	0.04	13100
42769	EF 10	9	6	10	16	M10	28	43	20	13	6.0°	14	0.06	18800
40585	EF 12	10	7	12	19	M12	32	50	22	15	5°	17	0.09	28000
40590	EF 17	14	10	17	25	M16	44	67	28	20	5°	22	0.21	57900
40250	EF 25	20	16	25	35	M24x2	62	94	42	30	3.5°	30	0.57	119100

Tolerances for Type EF

ØD1		ΔD1		ΔB1		ΔH	
>	≤	Tolerance		Tolerance		Tolerance	
-	5	+0.012	0	0	-0.12	+1.2	-1.2
5	18	0	-0.008	0	-0.12	+1.2	-1.2
18	30	0	-0.010	0	-0.12	+1.7	-1.7

Cable and input connector

Article-No.	Description
10323	Cable connector KS6 (6-pin series 581) incl. sensor mounting
10320	Cable connector KSSH15 (15-pin) incl. sensor mounting
43418	Input connector ZA9612FS (ALMEMO) incl. sensor mounting and connector calibration
49205	Input connector ZKD712FS (ALMEMO 202) incl. sensor mounting and connector calibration

Amplifiers

Examples of suitable amplifiers for the miniature tension force sensor K-100:

LCV	GM 78	GM 40	GM 80	GM 80-PA

Further suitable amplifiers you can find on our homepage under www.lorenz-messtechnik.de