


Single Point Load Cell AL with a Rated Load of 3 ... 30 kg

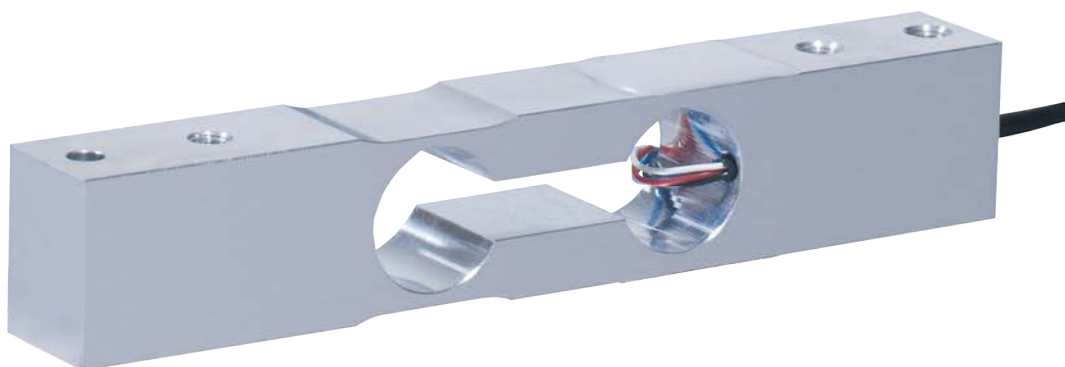


Performance Features


- Aluminum single point load cell
- 3000d OIML R60 and 5000d NTP approved
- Level of protection: IP65
- Designed for platforms of maximum dimensions 300 mm x 350 mm (off-center load compensated)
- Low cost model for high volume production
- ATEX 2014/34/EU version for hazardous area (option)

Application

- Food industry
- Chemical/pharmaceutical industry
- Dosing equipment in humid and corrosive environments



Dimensions in mm

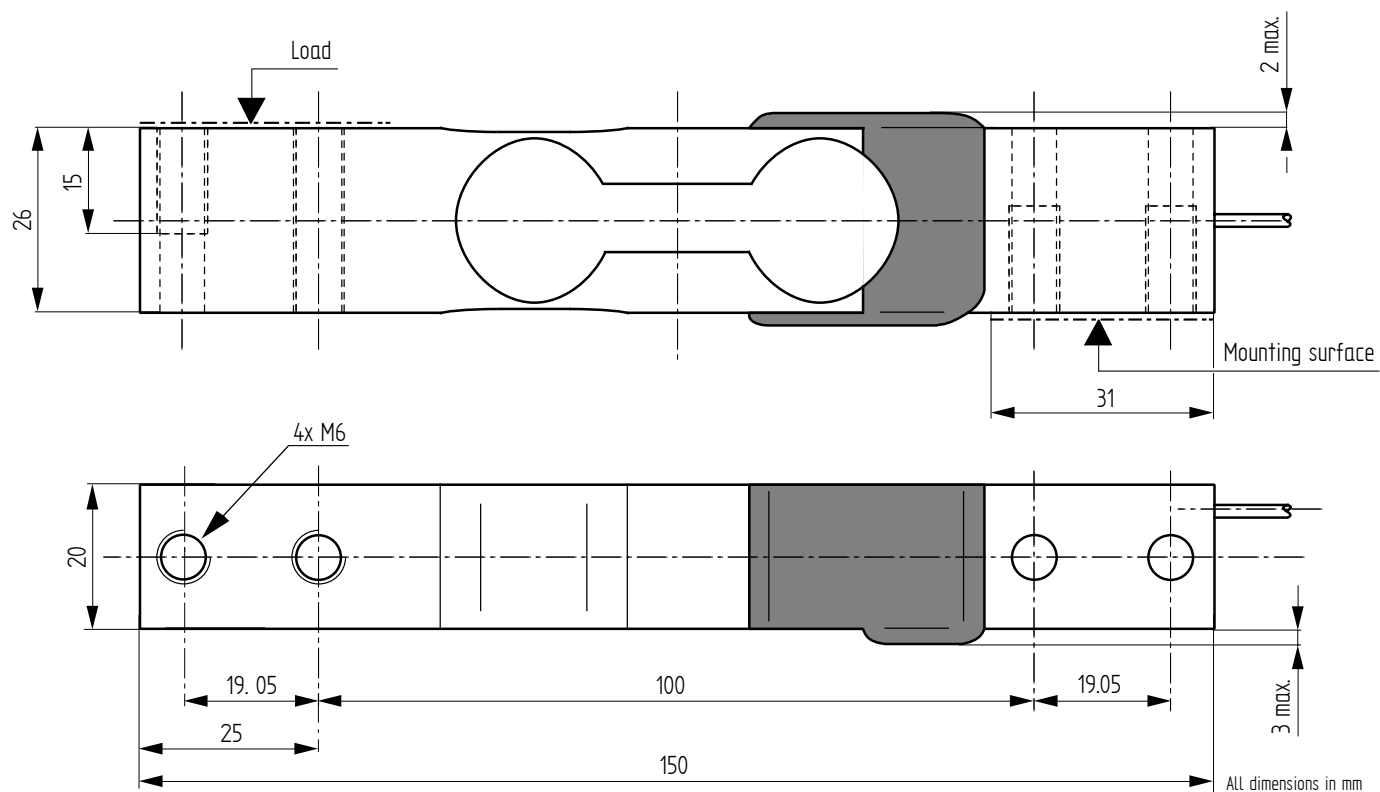

Article-No.	Version	Rated Load [kg]
103956	C3 10e	3
109843	C3 10e	5
103958	C3 10e	7
103959	C3 10e	10
103961	C3 10e	15
110847	C3 10e	30

Connection Assignment

Electrical Connection

Function	Wire Color
Excitation (+)	Red
Signal (+)	Black
Signal (-)	Blue
Excitation (-)	White

Technical Data

Type	AK	
Version		C3 10e
Rated load E	kg	3; 5; 7; 10; 15; 30
Maximum load for approved weighing E_{max}	kg	3.75; 6.25; 8.75; 12.5; 18.25; 37.5
Accuracy class OIML R60		C3
Maximum numbers of load cell intervals n_{max}	d OIML	3000
Minimum verification interval v_{min}	kg	E/12500
Creep division factor $Z = E_{max}/2 \times DR$		3000
Combined error	% E	±0.017
Temperature coefficient of zero signal	% E/°C	±0.0014
Temperature coefficient of characteristic value	% E/°C	±0.0014
Load creep d_{cr, F} in 30 min.	% E	±0.024
Zero balance	% E	±5
Rated output at E C_{nom}	mV/V	2 ±10 %
Rated range of excitation voltage B_{U, nom}	V	1 ... 15
Input resistance R_e	Ω	410 ±20
Output resistance R_a	Ω	350 ±5
Insulation resistance R_{is}	MΩ/50V	1000
Electrical connection		Cable, PVC, 1 m
Rated temperature range B_{T, nom}	°C	-10 ... 40
Operating temperature range B_{T, G}	°C	-20 ... 60
Limit load E_{lim}	% E _{max}	150
Breaking load E_b	% E _{max}	200
Tightening torque	Nm	15
Maximum platform dimension	mm	3 kg = 200 x 240; 5 ... 30 kg = 300 x 350
Level of protection		IP65
Material		Aluminum
Weight		0.17

Options

Article-No.	Description
111735	Protective coating
107798	ATEX 2014/34/EU, IECEx: ex II 1 G/D, Ex ia IIC T6 Ga, Ex ia IIIC T80 °C Da, IP6X, -20 °C < Ta < +60 °C (zones gaz 0/1/2, dust 20/21/22)
115049	ATEX 2014/34/EU, IECEx: ex II 1 D, Ex ta IIIC T125 °C Da, IP6X, -20 °C < Ta < +60 °C (zones dust 20/21/22)
115048	ATEX 2014/34/EU, IECEx: ex II 3 G, Ex nA IIC T6 Gc, -20 °C < Ta < +60 °C (zone gaz 2)


Accessories

Electrical Connection

Article-No.	Description
10323	Male cable connector KS6 (6-pin, Series 581) incl. mounting
10320	Male cable connector KSSH15 (15-pin) incl. mounting
43418	Input connector ZA9612FS (ALMEMO) incl. sensor mounting and connector calibration
49205	Input connector ZKD712FS (ALMEMO 202) incl. sensor mounting and connector calibration

Accessories (continued)

Weighing Electronics

ALCJB-A	CPJ/CPJ2S	IPE50 Panel
		

Further suitable accessories you can find on our homepage under:

https://www.lorenz-messtechnik.de/english/products/lc_weighing-electronics.php